

A better environment inside and out.®

Solar Gard® TrueVue™

Your true choice for architectural window film

DEALER INFORMATION



Solar Gard® TrueVue™ dual reflective window film provides the utmost optical clarity to provide your residential and commercial customers with stunning exterior views day and night.

TrueVue has:

- Warm neutral tone
- Low interior reflectance
- High solar heat rejection
- Significant glare reduction
- UV rejection >99%

TrueVue offers:

- Four shades, 5, 15, 30 and 40
- Limited lifetime residential and 10 year commercial warranty
- Manufactured in ISO 9001:2008 and ISO 14001:2004 certified plant



TrueVue features and benefits:

Low internal and external reflection

- Provides customers with superior external views day or night

Solar heat protection

- Decreases energy costs by reducing the need for air conditioning
- Improves comfort
- Reduces hotspots, allowing air conditioning systems to operate more efficiently

Warm rich tone


- Gives glass a pleasing neutral appearance
- Significant glare reduction of up to 94%

Blocks up to 99% of UV

- Protects retail merchandise, expensive artwork, precious antiques, carpets, flooring and furniture from damaging UV rays that help cause fading
- Protects occupants from UV exposure through windows

Limited lifetime residential and 10 year commercial warranty

- Guarantees customers a minimum length of service

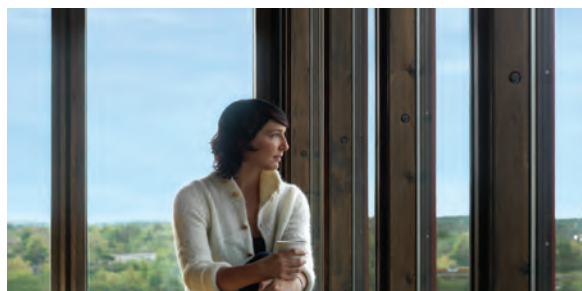

Performance measurements*

| | Solar energy transmittance (%) | Total solar energy absorptance (%) | Solar energy reflectance (%) | Visible light transmittance (%) | Visible light reflectance exterior (%) | Visible light reflectance interior (%) | Emissivity | Winter u-factor (Btu hr/ft² °F) | Shading coefficient | Solar heat gain coefficient | Solar selectivity index - luminous efficacy (VLT/SC) | Light to solar heat gain factor (VLT/SHGC) | Ultraviolet blocked (%) (300 to 380 nanometers) | Total solar energy rejected (%) | Solar heat gain reduction (%) | Glare reduction (%) |
|-------------|--------------------------------|------------------------------------|------------------------------|---------------------------------|--|--|------------|---------------------------------|---------------------|-----------------------------|--|--|---|---------------------------------|-------------------------------|---------------------|
| TrueVue™ 40 | 38 | 40 | 22 | 39 | 14 | 10 | .75 | .99 | .57 | .49 | .69 | .80 | >99 | 51 | 43 | 56 |
| TrueVue™ 30 | 27 | 41 | 32 | 31 | 22 | 13 | .75 | .99 | .45 | .39 | .70 | .81 | >99 | 61 | 55 | 65 |
| TrueVue™ 15 | 9 | 40 | 51 | 12 | 45 | 23 | .75 | .99 | .24 | .20 | .51 | .60 | >99 | 80 | 76 | 87 |
| TrueVue™ 5 | 6 | 43 | 51 | 5 | 45 | 8 | .75 | .99 | .21 | .18 | .25 | .29 | >99 | 82 | 79 | 94 |

* Performance results were obtained through measurements on the inside of 3mm (1/8") thick clear glass and were then calculated using NFRC methodology and LBNL Window 5.2 software, and are subject to variations within industry standards and only intended for estimating purposes.

www.solargard.com/us

Saint-Gobain Performance Plastics
4540 Viewridge Avenue
San Diego, CA 92123
Tel: 877-273-4364

PDF0165TVD 02/12

© Copyright 2012, Saint-Gobain Performance Plastics Corporation and/or its affiliates
All Rights Reserved • www.solargard.com

Please recycle

